




SELF-CLEANING AIRLESS SPRAY NOZZLE ASSEMBLY

603-01



3



WARNING - FLUID INJECTION HAZARD

- ⇒ NEVER remove or cut off the tip guard
- ⇒ NEVER put hands or fingers in front of spray nozzle
- ⇒ NEVER point a spray gun at any part of your body or anyone else.
- ⇒ NEVER leave the gun unattended when not in use.
- ⇒ ALWAYS release pressure and apply safety trigger lock (fig.7).

FEATURES


- ⇒ Fits all popular airless spray guns.
- ⇒ Low friction turning
- ⇒ Quick cylinder change by hand without tools.
- ⇒ Hand tightened seal system
- ⇒ Assembly suitable for solvent and waterbound paints.
- ⇒ Maximum working pressure: **517 bar. 7500 PSI**

TYPE OF AIRLESS GUN USED (fig 6)		GRACO SPEEFLO TITAN	DEVILBISS KREMLIN MERCURY SEARS	BINK'S 505	BÖLLHOFF-DETE ECCO FINISHING KRAUTZBERGER	ASAHI IWATA SEIWA	AIRLESSCO ASTURO HÜBNER LARIUS TAIVER WAGNER WWA
TYPE OF THREADS LAST DIGIT CODES		7/8x14 2	3/8 NPS 3	3/4x20 4	M18x1 5	M18x1,5 6	11/16x16 7

DESCRIPTION & REFERENCES

1,2,& 3 (incl. 4K kit)	Complete unit MK III	88-552	88-553	88-554	88-555	88-556	88-557
1	Safety guard	88-506	88-506	88-536	88-536	88-536	88-536
2	Adapter	88-512	88-512	88-544	88-545	88-546	88-547
3	Housing St.St.	88-504	88-504	88-534	88-534	88-534	88-534
4K & 4 K	Seal kit.	88-505	88-505	88-505	88-505	88-505	88-505
A	Pre-Adapter		88-523	OPTION: fits assy. 88-552			88-527
B	Gasket		21-008				21-008

EXPLODED VIEW of MK III ASSY.

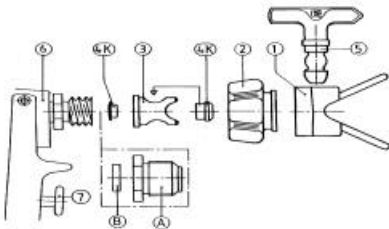

BALL-TIP CATEGORY LEGEND (fig 5)

- 88-301 ⇒ STD Standard BALL TIP cylinder
- 88-391 ⇒ Idem, with seal kit 4K.
REF: xxx tip size xxx e.g. 521= 50° .021"
- 88-302 ⇒ SF Superfine finish BALL TIP cylinder
- 88-392 ⇒ Idem, with seal kit 4K.
REF: xxx tip size xxx e.g. 412= 40° .012"
- 88-300 ⇒ LM Line-marking BALL TIP cylinder
- 88-390 ⇒ Idem, with seal kit 4K.
REF: xxx tip size xxx e.g. 339 =30° .039"



BASE UNITS

- 88-552 Base unit fits 7/8 x 14
- 88-553 Base unit fits 3/8 NPS
- 88-554 Base unit fits 3/4 20
- 88-555 Base unit fits M18 x 1
- 88-556 Base unit fits M18 x 1.5
- 88-557 Base unit fits 11/16 x 16

SPRAY TIPS

- 88-391 Standard ball tip and seal
- 88-392 SF Superfine ball tip and seal
- 88-390 Linemarking tip and seal

SPARE PARTS

- 88-506 Safety guard No 2 and 3
- 88-536 Safety guard Nos 4, 5, 6, 7
- 88-512 Adaptor
- 88-544 Adaptor
- 88-545 Adaptor
- 88-546 Adaptor
- 88-547 Adaptor
- 88-504 Housing stainless steel No 2 and 3
- 88-534 Housing stainless steel No 4, 5, 6, 7
- 88-505 Seal and gasket kit
- 88-523 Pre-adaptor 3/8 NPS F – 7/8 x 14 M
- 88-527 Pre-adaptor 11/16x16 F – 7/8 x 14 M
- 21-008 Gasket

IMPORTANT NOTE QUANTITY DISCOUNTS
10+ LESS 10% 30+ LESS 15%

IMPORTANT NOTE

Speedy III tip and seal kits are interchangeable into GRACO RAQ IV systems. The tip cylinders must be fitted with the matching seal supplied.

Exitflex (UK) Ltd
5 Airfield Road
Airfield Industrial Estate
Christchurch
Dorset BH23 3TG

Fax Order Line 0800 195 7965

All prices are nett, ex works

Tel.: 01202 478334
Fax.: 01202 488110
e-mail : sales@exitflex.co.uk
<http://www.exitflex.co.uk>