EXITFLEX®

"SPEEDY" REVERSIBLE TIPS

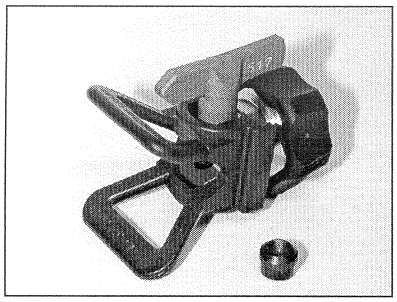

MKV

Maximum Working Pressure – **7,500 PSI**

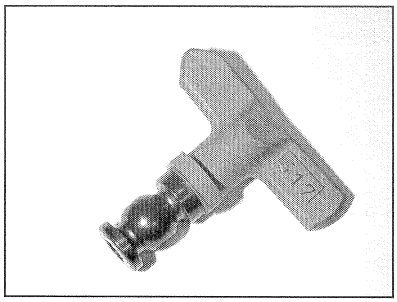

Part No.	Description
88-550	Base, includes guard, housing and seal
88-505	Seal
88-590	Line marking tip cylinder
88-591	Standard tip cylinder
88-592	Superfine finish tip cylinder
88-590K	Line marking tip cylinder and seal kit
88-591K	Standard tip cylinder and seal kit
88-592K	Superfine finish tip cylinder and seal kit

Orifice Size Inch 0.000"		Angles										
88-592	88-591	10	20	30	40	50	60	70	80	90	100	110
.006"		•	•	•	•							
	.007"	•	•	•	•	•						
.008"		•	•	•	•	•						
	.009"	•	•	•	•	•	•					
.010"			•	•	•	•	•					
	.011"	•	•	•	•	•	•	•				
.012"			•	•	•	•	•	•				
	.013"	•	•	•	•	•	•	•	•			
.014"			•	•	•	•	•	•	•			
	.015"	•	•	•	•	•	•	•	•	•		
.016"			•	•	•	•	•	•	•			
	.017" to .021" in .002 steps	•	•	•	•	•	•	•	•	•	•	
.018"			•	•	•	•	•	•	•			
	.023" to .043" in .002 steps		•	•	•	•	•	•	•	•	•	•
.020"					•	•	•	•	•			
	.045" to .049" in .002 steps				•	•	•	•	•	•	•	
.022"					•	•	•	•	•			
	.051" to .057" in .002 steps				•	•	•	•	•			
.024"					•	•	•	•	•			
	.059" to .061" in .002 steps				•	•	•					